SECURE. PRODUCTIVE. RECYCLING.







Reduce operational costs and keep customers happy with the amazing new iPRO-RC from JCM Global®! iPRO-RC has two large-capacity chambers with Roller Friction Recycling Technology holding recycled notes for instant payouts, keeping your equipment running and your customers happy. Plus, iPRO-RC has JCM's powerful anti-stringing technology, proven note acceptance and lockable removable cash box.

FEATURES

- Recycles two denominations, up to 100 notes each
- User- friendly modular design
- Roller Friction Recycling Technology
- · Dust and liquid protected design
- Field-proven, industry's best anti-stringing technology
- Future proof, state-of-the-art sensor package

BENEFITS

- Reduces float & eliminates coin starvation
- Easy maintenance and superior serviceability on site
- Direct bulk note refill into recycling chamberfor optimum uptime
- Keeps your machine running and reduces downtime
- Reliable and trouble-free operation of your machines
- Best counterfeit protection & first time acceptance



CASH BOX CAPACITY

- 400 notes
- 1000 notes (optional)

BANKNOTE SIZE

- Acceptance
 - L: 120-170 mm (4.72-6.69")
 - W: 62-85 mm (2.44-3.35") with 1000-note cash box
- Recycler
 - L: 120-158 mm (4.72-6.22")
 - W: 62-82 mm (2.44-3.23")

RECYCLE BOX CAPACITY

• 100 notes x 2 denominations

POWER REQUIREMENTS

- DC +24V (± 5%)
- Standby 200 mA
- Operation 1.5A
- Peak 2.5A

INTERFACE

 ID-003 Serial (Photo-Coupler Isolation/ TTL/RS 232), ccTalk

ENVIRONMENT

- Operation: 5 to 50 °C (41 to 122 °F)
- Storage: -20 to 60 °C (-4 to 140 °F)
- Humidity: 30% to 85% RH (No Condensation)

OPTIONS

- Plastic Bezel
- Metal Bezel
- Lock Module

Lock Module


Metal Bezel










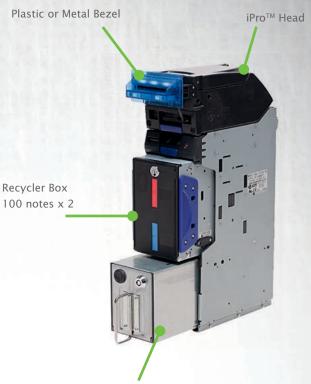

400 or 1000-note security cash box

ROLLER FRICTION RECYCLING TECHNOLOGY

- √ Direct bulk note refill into recycling chamber
- √ Easy maintenance and jam clearance on site
- √ Large recycling capacity in a compact form



LESS OPERATION COST = MORE REVENUE



EMEA: 49.211.5306.4550 • JAPAN: 81.6.6703.8400 • US: 702.651.0000 • US: 800.683.7248

jcmglobal.com